


150KVA Cummins Diesel Generator Set Datasheet



Model: KH-120GF
Engine: CUMMINS
Alternator: STAMFORD
Control Panel: UK DEEPSEA
Prime Power: 150KVA/120KW
Standby Power: 165KVA/132KW

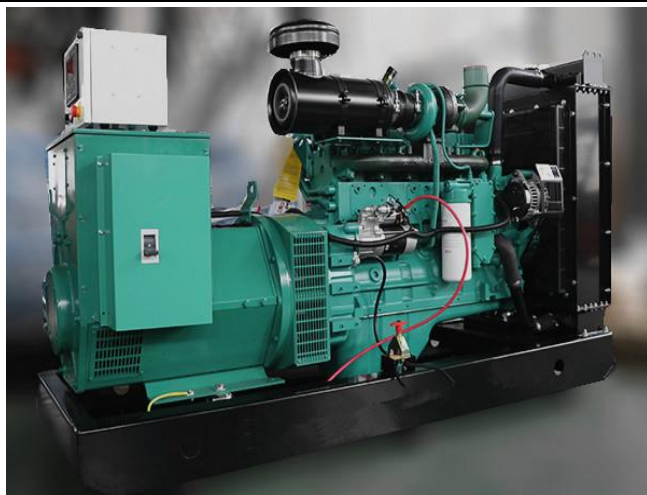

Prime power is available for an unlimited number of annual hours in variable load applications, in accordance with GB/T2820-97. A 10% overload capability is available for a period of 1 hour within a 12-hour operation cycle.

The standby power rating is intended for supplying emergency power during utility power interruptions. No overload, utility parallel, or negotiated outage operation capabilities are available at this rating..

Standard Specification

Genset model	Voltage	Frequency	Phase	Power Factor	Protection Class	Insulation Grade
KH-120GF	240/415V	50HZ	3	0.8(lagging)	IP23	H

Engine and genset output rating

Engine model	Engine Speed (RPM)	Prime (KW/HP)	Standby (KW/HP)	Genset Model	Prime (KVA/KW)	Standby (KVA/KW)
6BTAA5.9-G12	1500	140/187	155/207	KH-120GF	150/120	165/132

Scope of standard supply

Engine:	CUMMINS
Alternator:	STAMFORD
Controller:	Automatic controller DSE7320MKII with AMF function
Breaker:	Manual circuit breaker 3-pole, China CHNT
Radiator:	Cummins 50°C
Vibration:	Vibration damper installed between the engine/alternator and the base frame.
Base:	Heavy duty steel channel base frame
Silencer:	Heavy duty industrial type silencer with flexible bellow,elbow
Battery:	High capacity sealed free maintenance battery C/W battery cables
Manuals:	Standard tools, operator's manual of engine ,alternator , controller, breaker


Optionals

Sound Attenuated Enclosure	Oil/ Water/Fuel Heating system	Anti condensation heater
Heater Preservation Cabinet	Automatic Transfer Switch (ATS)	Daily Fuel Tank
Rainproof Cabinet	Remote Control System	Output Cable
Sound Attenuated Container (20GP/20HC/40HC)	Synchronization System	Maintainance Spare Parts
Trailer (10-500KVA)	Breaker brand (ABB,Simens,Schneider)	Plywood Case Packing

DIMENSIONS(L*W*H) And Weight

PROCESS FLOW:Drawing→Cutting→Bending→Welding→Spraying→Assembling→Testing

Open Type	1320KG	Silent Type	1980
	2260*800*1300mm		3150*105*1800mm

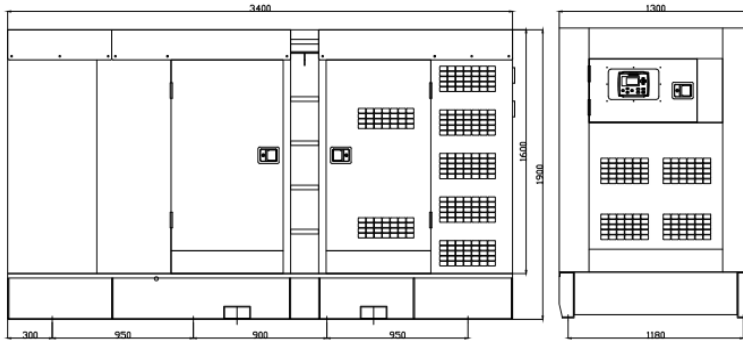

Sound Attenuated Enclosure

IP rated sound attenuated weatherproof enclosure designed for rugged conditions

Excellent security: The totally-enclosure is manufactured from 2 mm high quality galvanised cold-rolled steel plates.

Ventilation: combined combustion and ventilation cooling.

Excellent sound attenuation, with anti-drumming treatment which effectively lowers the sectional noise during normal running of the gen-sets.

The enclosure uses high frequency, medium frequency and low frequency type of PUR anti-flaming and sound-absorbing cotton, which could reduce the noise produced by the genset.

The door uses an EPDM type sealing system.

High efficiency absorptive mufflers which helps reduce exhaust noise.

Convenient transport using four point lifting arrangement.



Warranty

Warranty is according to our standard conditions:12 months or 1,000 running hours, subject to the earlier one (artificial damage to be an exception).

Certifications


European Safety Standard: CE Certificate

ISO9001:2015 Quality Control System

CUMMINS OEM CERTIFICATE

STAMFORD OEM CERTIFICATE

CUMMINS Diesel Engine

Engine Brand	Cummins	
Engine Manufacturer	Cummins(China) Power Technology Co.,Ltd	
Engine Model	6BTAA5.9-G15	
Engine Rated Power	96KW @1500RPM	
Cylinder Arrangement	6 in line	
Cycle	Four stroke	
Aspiration	Turbocharged & Charge Air Cooled	
Fuel System	BYC P7100	
BorexStroke (mmxmm)	102x120	

Displacement(L)	5.9	
Compression Ratio	17.3:1	
Speed Governor	Electronic	
Cooling System	Forced Water Cooling Cycle	
Starter Motor	DC24V electrical starting	
Exhaust System		
Exhaust Gas Flow (l/s)	321	
Exhaust Temperature(°C)		
Standby Power	507	
Prime Power	495	
Max Back Pressure(kPa)	10	
Air Intake System		
Max Intake Restriction(kPa)		
Dirty Element	6.2	
Clean Element	3.7	
Air Flow(l/s)	105	
Fuel System		
Type Injection System	BYC P7100	
110%(Standby Power) Load(L/H)	38	
100%(Prime Power) Load(L/H)	34	
75%(Prime Power) Load(L/H)	26	
50%(Prime Power) Load(L/H)	17	
25%(Prime Power) Load(L/H)	10	
Oil System		
Maximum Oil Temperature(°C)	121	
Oil Pressure at Rated RPM(kPa)	207-345	
Minimum Required Lube System Capacity (L)	16.4	
Cooling System		
Coolant Capacity - Engine Only(L)	10	
Thermostat range(°C)	82-95	
Max Water Temperature Standby/Prime(°C)	104/100	
Specification of STAMFORD alternator		
Alternator Brand	Stamford	
Engine Manufacturer	Cummins GeneratorTechnologies (China) Co., Ltd	
Alternator Model	UCI274F	STAMFORD®
Alternator Rated Power	160KVA/128KW	
Rated Voltage	415V	
Rated frequency	50HZ	
Connecting Type	3 Phase and 4 Wires	
Number of Bearing	1	
Protection Grade	IP23	
Altitude	≤1000m	
Exciter Type	Brushless ,Self-exciting, AVR automatic voltage regulating,100% Copper winding wire	

Insulation Class	H
Telephone Influence Factor (TIF)	≤50
THF	≤2%
Voltage Regulation, Steady State	≤±1%
Transient State Voltage	≤-15% ~ +20%

Specification of control System (Deepsea DSE7320MKII Module)

DSE7320 controller is an advanced control module based on micro-processor, It is an Auto Mains (Utility) Failure Control Module (AMF), have been designed to start and stop generating sets that include electronic And non-electronic engines. Include the additional capability of being able to monitor a mains (utility) supply. when main is not available, It can automatically start the engine and close generating sets breaker automatically, Accurately measure various operational parameters and display all values and alarms information on the LCD. In additional, it can automatically open breaker, and shutdown the engine after the main supply recovers.

Main Features

- Automatic Mains Failure (AMF) and Automatic Transfer Switch (ATS) with communication and expansion capabilities.
- Designed to operate with electronic, non-electronic, or gas engines simultaneously, supporting various types of engine ECUs.
- Selectable modes include Manual, Automatic, Test, and Remote Control.
- Monitors and measures operational parameters of the mains supply and generator set.
- Displays operational status, fault conditions, all parameters, and alarms.
- Provides multiple protections and displays various parameters.
- Includes 12 inputs and 8 outputs, with 8 configurable inputs and 4 configurable outputs.
- 4 analog inputs for kinds of optional sensors that can be used for measuring oil pressure, coolant temperature, fuel level and so on; parameters can be configured by user.
- Can be programmed using the front panel or by using the PC software.
- Support twelve languages. The language was edited by customer.
- Graded protection: pre-alarm, shutdown and electrical trip, flexible setting.
- The module can be pre-set for four operating modes and protecting parameters.
- The firmware can be updated automatically, so customer can have the latest version.

Key Features

- 4-Line back-lit LCD text display
- Multiple Display Languages
- Five key menu navigation
- LCD alarm indication
- Heated display option available
- Customisable power-up text and images
- DSENet expansion compatibility
- Data logging facility Internal PLC editor
- Protections disable feature Fully configurable via PC using USB, RS232 & RS485 communication
- Front panel configuration with PIN protection
- Power save mode
- 3 phase generator sensing and protection
- 3 phase mains (utility) sensing and protection (DSE7320 MKII only)
- Automatic load transfer control (DSE7320 MKII only)
- Generator current and power monitoring (kW, kvar, kVA, pf)
- Mains current and power monitoring (kW, kvar, kVA, pf) (DSE7320 MKII only)
- kW and kvar overload and reverse power alarms
- Over current protection



Unbalanced load protection
Independent earth fault protection Breaker control via fascia buttons
Fuel and start outputs configurable when using CAN
6 configurable DC outputs
2 configurable volt-free relay outputs
6 configurable analogue/digital inputs
Support for 0 V to 10 V & 4 mA to 20 mA sensors
8 configurable digital inputs
Configurable 5 stage dummy load and load shedding outputs
CAN, MPU and alternator frequency speed sensing in one variant
CAN, MPU and alternator frequency speed sensing in one variant
Manual and automatic fuel pump control
Engine pre-heat and post-heat functions
Engine run-time scheduler
Engine idle control for starting & stopping
Fuel usage monitor and low fuel level alarms
Simultaneous use of RS232 and RS485 communication ports
True dual mutual standby using RS232 or RS485 for accurate engine hours balancing.
MODBUS RTU support with configurable MODBUS pages.
Advanced SMS messaging (additional external modem required)
Start & stop capability via SMS messaging
3 configurable maintenance alarms
Compatible with a wide range of CAN engines, including tier 4 engine support
Uses DSE Configuration Suite PC Software for simplified configuration
Licence-free PC software
IP65 rating (with supplied gasket) offers increased resistance to water ingress
Modules can be integrated into building management systems (BMS) using MODBUS RTU
Key Benefits
Automatically transfers between mains (utility) and generator (DSE7320 MKII only) for convenience.
Hours counter provides accurate information for monitoring and maintenance periods
User-friendly set-up and button layout for ease of use
Multiple parameters are monitored & displayed simultaneously for full visibility
The module can be configured to suit a wide range of applications for user flexibility
PLC editor allows user configurable functions to meet user specific application requirements.